



MAKE EVERYTHING EASIER



Equipment Rayong Co.,Ltd



@iseerayongservice





MANUAL STACKER





Forged Forks



SDJA500

SDJA1000

SDJA1500

- With adjustable forks between 200-950mm.
- Lifting Height from 1600mm to 2500mm.
- High quality steel mast ensures rigidity and durability.
- Adjustable forged forks.
- High effort pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lifting chains.
- With safety wheel guard and brake system to ensure safety during operation.

Model		SDJA500	SDJA1000	SDJA1500
Load capacity/rated load	Q(kg)	500	1000	1500
Load centre distance	c(mm)	500	500	500
Fork height, lowered	h_{13} (mm)	90	90	90
Height, mast lowered	h_1 (mm)	2000	2085/1840	2090
Max. lift height	h_3 (mm)	1600	1600/2500	1600
Height, mast extended	h_4 (mm)	2010	2165/2925	2150
Overall length	l_1 (mm)	1380/1640	1380/1640	1380/1640
Overall width	b_1 (mm)	805	1000/750	1000
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)	30/100/800(1060)
Width overall forks	b_5 (mm)	200-745	200-950/700	200-950
Ground clearance, laden, below mast	m_1 (mm)	20	25	25
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1915	1915	1915
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1910	-	-
Turning radius	W_a (mm)	1235	1235	1235
Lift speed,laden/unladen	mm/time	25	25	21
Lowering speed,laden/unladen	mm/s	Manual control	Manual control	Manual control
Service weight	kg	161	250/316	280

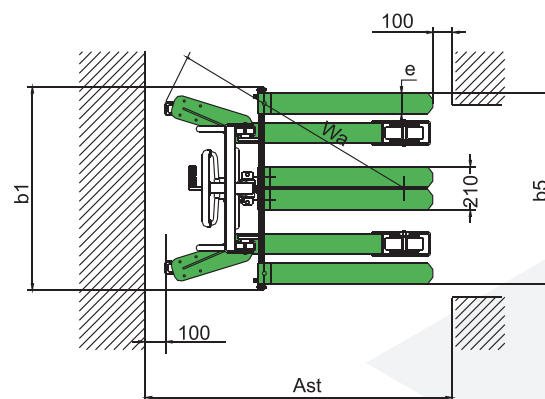
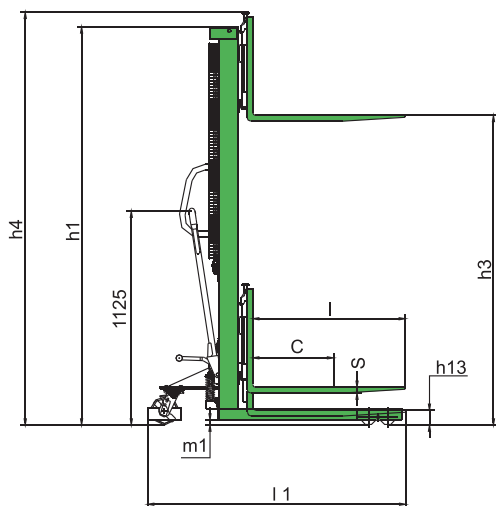




SDJAS500 SDJAS1000

- Straddle legs width reach 1300mm(500kg)and1250mm(1000kgs).
- Lifting Height from 1500-1600mm.
- With adjustable forged forks.
- High quality steel mast ensures rigidity and durability.
- High efficient pumps makes the control easier to operate.
- Foot and hand controlled lifting function allows the operator to work without having to perform extreme body movements.
- Metal grid protects user from lift chains.
- With safety wheel guard and brake system to ensure safety during operation.

Model		SDJAS500	SDJAS1000
Load capacity/rated load	Q(kg)	500	1000
Load centre distance	c(mm)	500	500
Fork height, lowered	h_{13} (mm)	70	70
Height, mast lowered	h_1 (mm)	2000	2050
Max. lift height	h_3 (mm)	1600	1600
Height, mast extended	h_4 (mm)	2100	2155
Overall length	l_1 (mm)	1340/1600	1300/1560
Overall width	b_1 (mm)	1525	1475
Fork dimensions	s/e/l(mm)	48/100/800(1060)	30/100/800(1060)
Width overall forks	b_5 (mm)	745	950
Round clearance, laden,below mast	m_1 (mm)	25	25
Aisle width for pallets 000x1200 crossways	A_{st} (mm)	1975	1975
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1915	1915
Turning radius	W_a (mm)	1200	1200
Lift speed,laden/unladen	mm/time	25	25
Lowering speed,laden/unladen	mm/s	Manual control	Manual control
Service weight	kg	223	294

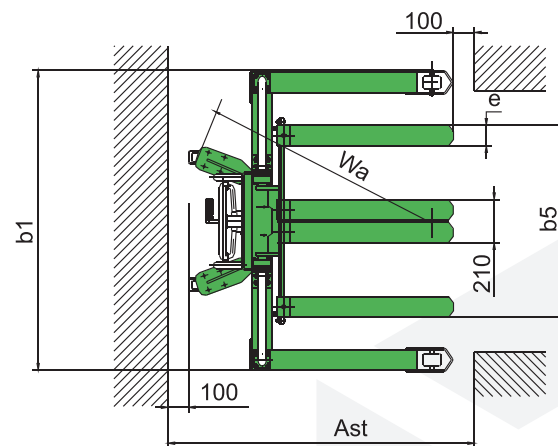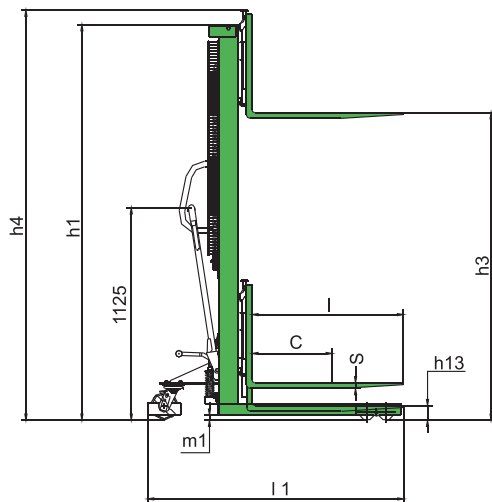



TEL: 0086-532-66739792

FAX: 0086-532-66739791

info@movmes.com

NO.88 Chunyang Road,Chengyang,
QINGDAO,CHINA

www.movmes.com